

## Filling valve 4180

- Dezincification resistant brass
- 15CU compression fittings
- Double check valve



### Description

Filling valve.

### Construction

Filling valve with angle seat design in dezincification resistant brass with a spring loaded check and shut-off valve. An additional check valve has been integrated in the valve outlet. Connection compression fittings 15CU. Gasket in EPDM.

### Marking

CR, flow direction arrow, company logo.

### Maintenance

This valve is normally maintenance-free, but should be checked periodically.


### Installation

Tighten nuts with a fixed spanner or wrench according to the prescribed installation instructions. Support sleeves must be used for all pipe types.

### Technical data

Body	Dezincification resistant brass CW625N
Seat gasket	EPDM
Stem gaskets	EPDM/EPDM
Check valve	POM

Maximum working pressure: 10 bar  
Maximum working temperature: +90°C  
Minimum working temperature: +2°C

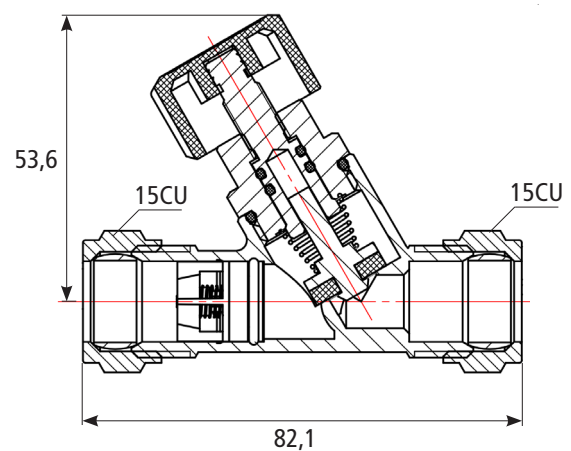

Item number	Description	Connection	Length	Height	Weight (kg per piece)
0441801500	Filling valve 4180-15, 15CU, check valve	15CU	82,1	53,6	0,24

All dimensions in millimetres

Subject to technical changes and corrections without notice