

Filling valve 4184

- Dezincification resistant brass
- 15CU compression fittings
- Check valve



Description

Filling valve.

Construction

Filling valve with angle seat design in dezincification resistant brass with a spring loaded check and shut-off valve. Connection compression fittings 15CU. Gaskets in NBR.

Marking

CR, flow direction arrow, company logo.

Maintenance

This filling valve is normally maintenance-free, but should be checked periodically.


Installation

Tighten nuts with a fixed spanner or wrench according to the prescribed installation instructions. Support sleeves must be used for all pipe types.

Technical data

Body	Dezincification resistant brass CW625N
Seat gasket	NBR
Stem gaskets	NBR/NBR

Maximum working pressure: 10 bar
Maximum working temperature: +90°C
Minimum working temperature: +2°C

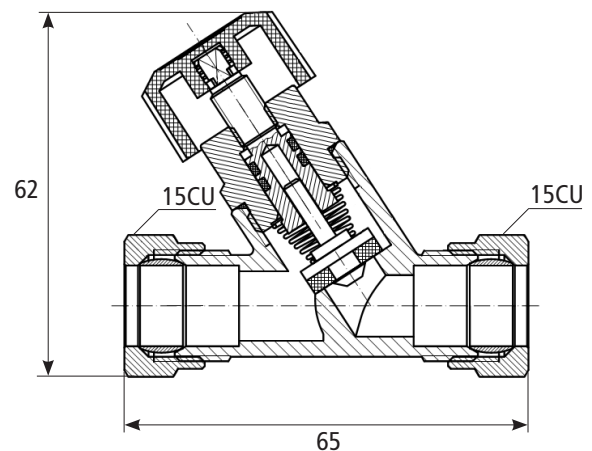

Item number	Description	Connection	Length	Height	Weight (kg per piece)
0441841500	Filling valve 4184-15, 15CU, check valve	15CU	65	62	0,21

All dimensions in millimetres

Subject to technical changes and corrections without notice