

Strainer 1530 and 1535

- Dezincification resistant brass
- Male thread $\frac{3}{4}$ "
- Changeable stainless strainer insert



Description

Strainer.

Construction

Strainer in dezincification resistant brass. Connection male thread $\frac{3}{4}$ ". O-ring in EPDM. Key grip.

Model 1530

With straight body. Changeable stainless strainer insert with a mesh of 0,60mm.

Model 1535

With angled body. Changeable stainless strainer insert with a mesh of 0,50mm.

Marking

Flow direction arrow, PN.

Maintenance

Clean the strainer insert when necessary.


Technical data

Body	Dezincification resistant brass CW625N
Strainer insert	Stainless steel AISI 304
O-ring	EPDM


Maximum working pressure: 16 bar

Maximum working temperature: +120°C

1530

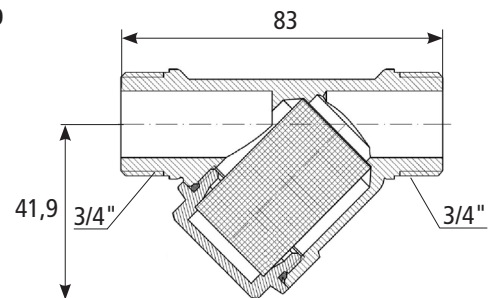

1535

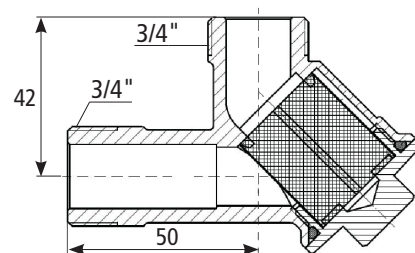

Item number	Description	Connection thread	Length	Centrum height	Weight (kg per piece)
0815300200	Strainer 1530-20, $\frac{3}{4}$ "M	$\frac{3}{4}$ "M x $\frac{3}{4}$ "M	83	41,9	0,28
0815350200	Strainer 1535-20, $\frac{3}{4}$ "M, angle	$\frac{3}{4}$ "M x $\frac{3}{4}$ "M	50	42	0,30

All dimensions in millimetres

Subject to technical changes and corrections without notice