

## Filling valve 4182 check valve

- Dezincification resistant brass
- 15CU compression fittings
- Check valve



### Description

Filling valve.

### Construction

Angled ball valve in dezincification resistant brass with spring loaded check valve. Connection compression fitting 15CU. Seals in PTFE, gaskets in NBR. Key grip. T-handle in aluminium.

### Marking

CR, flow direction arrow, company logo.

### Maintenance

The ball valve must be operated periodically, two to three times a year.


### Installation

Tighten nuts with a fixed spanner or wrench according to the prescribed installation instructions. Support sleeves must be used for all pipe types.

### Technical data

Body	Dezincification resistant brass CW625N
Ball seal	PTFE
Stem gaskets	NBR/NBR
Check valve	POM

Maximum working pressure: 10 bar  
Maximum working temperature: +90°C  
Minimum working temperature: +2°C

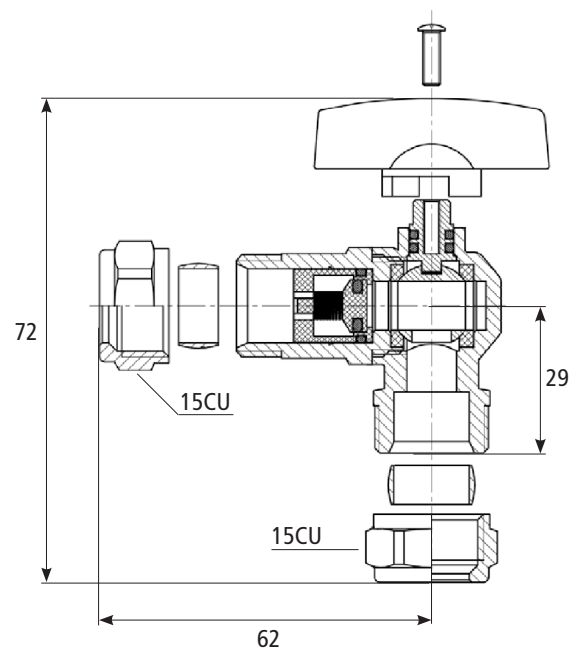

Item number	Description	Connection	Centrum length	Height	Weight (kg per piece)
0441821500-1	Filling valve 4182-15, 15CU, T-handle, check valve	15CU	62	72	0,18

All dimensions in millimetres

Subject to technical changes and corrections without notice