


# Ball valve 1802 rotating

- Dezincification resistant brass
- Male thread 1/2"
- Screw driver slot

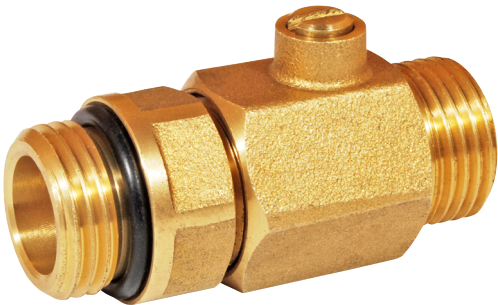

## Description

Ball valve.

## Construction

Ball valve in dezincification resistant brass with rotating body and screw driver slot to operate the valve. Connection male threads 1/2". Gaskets in NBR. Key grip.


## Maintenance

The ball valve must be operated periodically, two to three times a year.

## Technical data

Body	Dezincification resistant brass CW625N
Ball seal	PTFE
Stem gasket	NBR
Gasket (o-ring)	NBR

Maximum working pressure: 16 bar  
Maximum working temperature: +90°C  
Minimum working temperature: +2°C

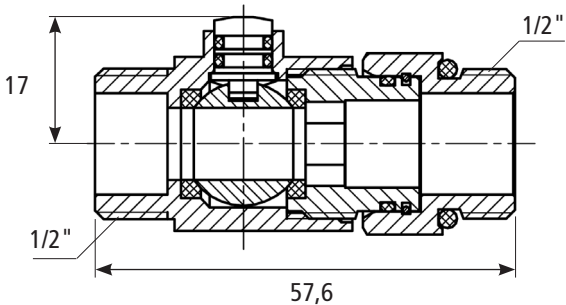

Item number	Description	Connection thread A	Length L	Centrum height H	Weight (kg per piece)
0418021500	Ball valve 1802, 1/2" M rotating x 1/2" M	1/2" M	57,6	17	0,14

All dimensions in millimetres

Subject to technical changes and corrections without notice