Filter cartridge housing

- 9¾"
- High capacity
- Robust design

Description

Filter cartridge housing.

Construction

Filterhead i polypropylene with male brass thread 1". Filter bowl in SAN. Air vent screw on top in brass.

Cartridges

Nylon	0850028000
Cotton	0850019000
Carbon/Cotton	0850022000
Carbon	0850025000

Marking

Flow direction arrow.

Maintenance

Clean the filter catridge when necessary.

Technical data

Filterhead	Polypropylene
Filter bowl	SAN
Threads	Brass
O-ring	NBR

Maximum working pressure: 8 bar
Maximum working temperature: +50°C
Minimum working temperature: +5°C

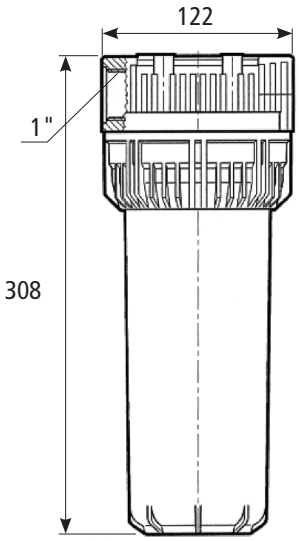

Item number	Description	Connection thread	Length	Height	Size	Weight (kg per piece)
0850010000	Filter cartrigde housing	1"F	122	308	9 3/4"	1,07

All dimensions in millimetres

Subject to technical changes and corrections without notice